


UHF Midrange Reader / Writer Desktop Reader SIR-9151-R2-UE



- compact UHF RFID midrange reader/writer for desktop applications
- suitable for on-metal applications
- reading distance up to 50 cm (ISO-card size)
- integrated antenna
- no tag detection outside of the antenna area
- CE

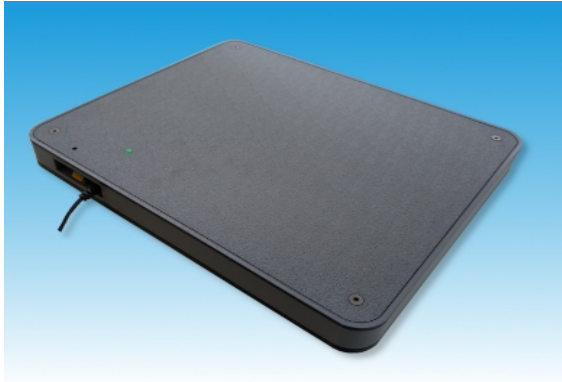

Technical Data:

| | |
|-------------------------|--|
| Dimensions: (l x w x h) | (310 x 260 x 28) mm |
| Power supply: | External 12 V/1 A DC (12 V-24 V) |
| Transmit frequency: | 868 MHz |
| Antenna: | integrated |
| Output Power: | up to 20 dBm (100 mW) ± 1 dBm |
| Transponders: | UHF: ISO 18000-6C, EPC Gen2 |
| Interface: | Ethernet, USB 2.0, RS232 |
| Status LED: | Power / Tag Detect / Connection |
| Housing: | Plastic material with metal baseplate / IP20 |
| Weight: | 1.2 kg |
| Operating temperature: | 0 °C to +50°C |

Order Information:

| | | |
|--|------------|----------|
| SIR-9151-R2-UE (OEM without package) | Order-No.: | 220.9157 |
| Power Supply | Order-No.: | 999.1280 |
| Protective cap to prevent mechanical damage and accidental disconnection of the connector. | Order-No.: | 999.1134 |