


125 kHz Industrial Reader / Writer SIR-5200

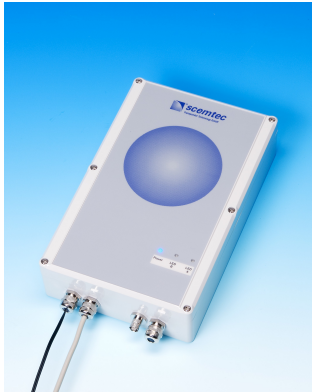

- multi standard reader/writer for industrial use
- proximity Tag reader/writer
- multi-TAG compatible

Technical Data:

Dimensions: (l x w x h)	250 x 160 x 57 mm
Power supply:	9 - 24 V DC
Current consumption:	typ. 100 mA @ 12 V DC
Transmit frequency:	125 kHz
Transponders:	NXP Hitag1/Hitag S EM V4001; EM 4002; EM 4100 (Manchester); EM 4102 (Manchester); EM 4200 UNIQUE EM V4050; EM 4450 (Manchester); TITAN Temic T5550/5551
Interface:	RS232 USB Ethernet
In-/Outputs:	2 binary inputs / 2 binary outputs
Housing:	ABS / IP65
Operating temperature:	-10° C to 60° C

Order Information:

SIR-5200

Order-No.: 220.2020